Technical Service BULLETIN

November 28, 2005

Title: DOME FUSE INSTALLATION DURING PDS

Models:

'06 Prius



Introduction


The DOME fuse has been removed on the Prius at the assembly plant to reduce parasitic current draw in transit and storage. Reinstall the DOME fuse during Pre-Delivery Service (PDS).

Applicable Vehicles

2006 model year Prius vehicles.

Installation Procedure

The DOME fuse (15A) is stored in the blank space of the Relay Block in the engine compartment. The DOME fuse must be reinstalled to the original location during Pre-Delivery Service (PDS) at the dealership as shown below.

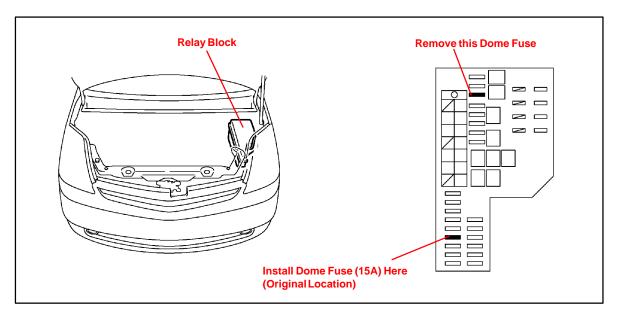

NOTE:

If the vehicle is stored in the dealership for a long period of time after PDS, disconnect the negative (–) battery terminal to prevent battery discharge. Refer to TSB No. PG007-03, "Maintenance for HV and Auxiliary Batteries," for additional information.

Warranty Information

OP CODE	DESCRIPTION	TIME	OFP	T1	T2
N/A	Not Applicable to Warranty	-	_	-	-

