



Technical Service BULLETIN

November 23, 2005

Title:

FRONT EMERGENCY TOWING EYELET & EYELET HOLE COVER

Models:

'06 Prius

PRE-DELIVERY SERVICE
PD080-05

Introduction Utilize the following procedures to remove the front emergency towing eyelet and install the eyelet hole cover prior to customer delivery.

Applicable Vehicles

- **2006** model year **Prius** vehicles.

Warranty Information


OP CODE	DESCRIPTION	TIME	OFP	T1	T2
N/A	Not Applicable to Warranty	—	—	—	—

Removal & Installation Procedure


1. Remove the emergency towing eyelet from the front bumper by turning it counterclockwise.

NOTE:

If it is hard to loosen the emergency towing eyelet, use a steel bar.

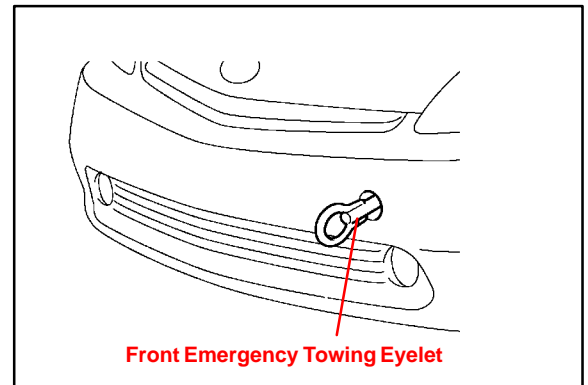

2. Put the eyelet into its molded space of the tool box located in the luggage compartment.

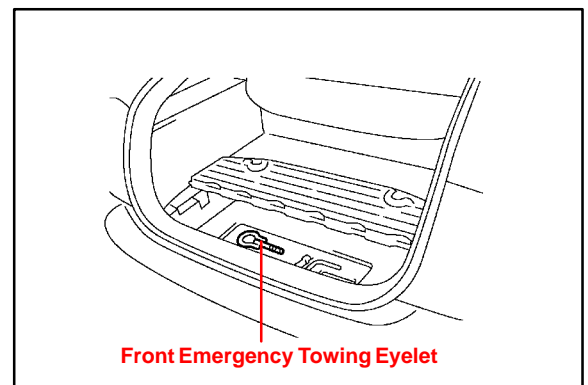

**Removal &
Installation
Procedure**
(Continued)

3. Install the front emergency towing eyelet hole cover which is stored in the glove box onto the front bumper. Insert the arrow-shaped part “A” of the front eyelet hole cover into hole “B” of the front bumper as illustrated.

